




Ecoline modular system luminaire, left

8 797 056 209
 $6 \times 2,5 \text{ W}$, 1059 lm, 3000 K warm white, 1-10V,
 wall washer $12^\circ / 108^\circ$,

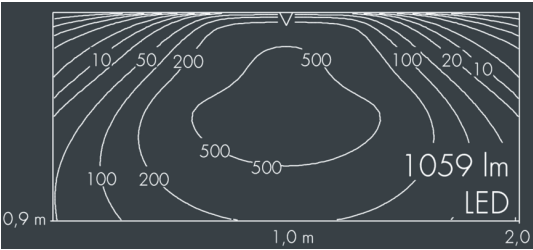

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, UV stabilised, impact-resistant polycarbonate cover with partial frosting for uniform light diffraction, silicon gasket, closure with 2 stainless steel screws, with stainless steel coupling on right side, tilt range: 220° , cable gland: M20, connecting terminal: 5 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks, CRI > 80, max 2 SDCM, service life $L_{90}/B_{10} > 50.000 \text{ h}$, Beam angle (FWHM): $12^\circ / 108^\circ$, luminous flux: 1059 lm, wattage: 15 W, delivered lumens 71 lm/W, protection type IP65, protection class I, impact resistance IK10, windage area $0,04 \text{ m}^2$, dimensions (L×H×W): $642 \times 58 \times 54 \text{ mm}$, weight 2.3 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



Specification

Wattage	15 W	Beam angle (FWHM)	$12^\circ / 108^\circ$
Delivered lumens	71 lm/W	Housing colour	silver grey
Light source	LED 3000 K	Power supply cable	$\varnothing 6 - 10 \text{ mm}$
Color Rendering Index	CRI > 80	Protection type	IP65
Colour tolerance	max 2 SDCM	Protection class	I
Lifetime $t_a 25^\circ \text{ C}$	$L_{90}/B_{10} > 50.000 \text{ h}$	Impact resistance	IK10
Control gear	1-10V	Windage area	$0,04 \text{ m}^2$
Input voltage AC	110 – 240 V	Dimensions	$642 \times 58 \times 54 \text{ mm}$
Input voltage DC	195	Weight	2,30 kg
Voltage protection	2 kV L/N 4 kV L/PE	Max. ambient temperature t_a	40°
Luminaires per B16A / C16A	50 / 85		