


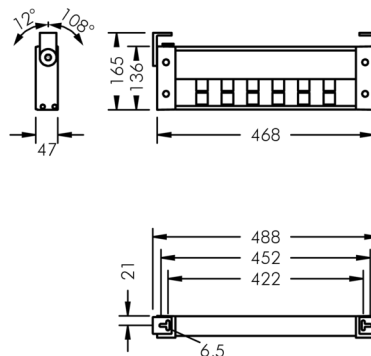

IP 65 IK 10

Wattage	29 W	Beam angle (FWHM)	15° / 103°
Delivered lumens	83 lm/W	Housing colour	white RAL 9002
Light source	LED 4000 K	Power supply cable	Ø 7 – 9 mm
Color Rendering Index	CRI > 80	Protection type	IP65
Colour tolerance	max 2 SDCM	Protection class	I
Lifetime ta 25° C	L90/B10 > 50.000 h	Impact resistance	IK10
Control gear	on / off	Windage area	0,06m²
Input voltage AC	220 – 240 V	Dimensions	470 × 47 × 135 mm
Input voltage DC	220 – 240 V	Weight	2,90 kg
Voltage protection	2 kV L/N 4 kV L/PE	Max. ambient temperature ta	35°
Luminaires per B16A / C16A	50 / 51		