
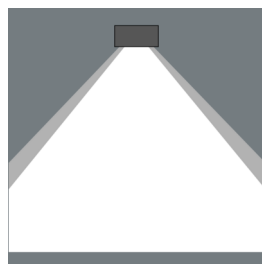
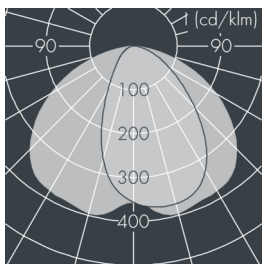


## Fluxa Mini

8 290 046 179

36 W, 3157 lm, 3000 K warm white, DALI, wide beam

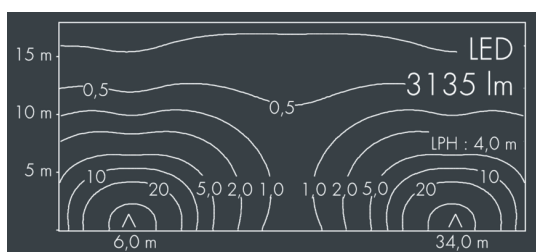

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification

|                            |                      |                             |                     |
|----------------------------|----------------------|-----------------------------|---------------------|
| Wattage                    | 36 W                 | Housing colour              | black RAL 7021      |
| Delivered lumens           | 88 lm/W              | Power supply cable          | Ø 7 – 9 mm          |
| Light source               | LED 3000 K           | Protection type             | IP65                |
| Color Rendering Index      | CRI > 70             | Protection class            | I                   |
| Control gear               | DALI                 | Impact resistance           | IK08                |
| Input voltage AC           | 220 – 240 V          | Windage area                | 0,047m <sup>2</sup> |
| Input voltage DC           | 195 – 250 V          | Dimensions                  | 250 × 89 × 185 mm   |
| Voltage protection         | 2 kV L/N   4 kV L/PE | Weight                      | 2,30 kg             |
| Luminaires per B16A / C16A | 50 / 85              | Max. ambient temperature ta | 35°                 |

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, with prismatic glass for reduced glare, silicon gasket, closure with 4 stainless steel screws, mounting bracket powder coated aluminum with tilt scale: 4 drilled holes Ø 8,5 mm, spacing 70 mm (120 mm), 1 centre hole Ø 17 mm, tilt range: 210°, cable gland: M16, connecting terminal: 5 pole, highly efficient anodized rotationally symmetrical reflector with matt finish, integral, dimmable driver (DALI), CRI > 70, luminous flux: 3157 lm, wattage: 36 W, delivered lumens 88 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,047 m<sup>2</sup>, dimensions (L×H×W): 250 × 89 × 185 mm, weight 2.3 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK08