
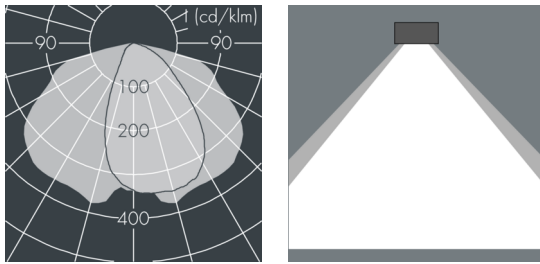


## Fluxa Mini

8 290 065 259

36 W, 3414 lm, 4000 K neutral white, 1-10V,  
wide beam 61° / 145°

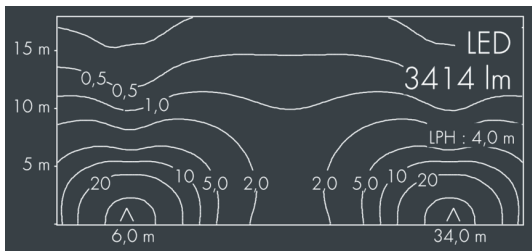

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, mounting bracket powder coated aluminum with tilt scale: 4 drilled holes Ø 8.5 mm, spacing 70 mm (120 mm), 1 centre hole Ø 17 mm, tilt range: 210°, cable gland: M16, connecting terminal: 5 pole, highly efficient anodized rotationally symmetrical reflector with matt finish, integral driver (1-10V), CRI > 70, max 3 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 61° / 145°, luminous flux: 3414 lm, wattage: 36 W, delivered lumens 96 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,047 m², dimensions (LxHxW): 250 x 89 x 185 mm, weight 2.3 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK08

## Specification

|                            |                      |                             |                   |
|----------------------------|----------------------|-----------------------------|-------------------|
| Wattage                    | 36 W                 | Beam angle (FWHM)           | 61° / 145°        |
| Delivered lumens           | 96 lm/W              | Housing colour              | white RAL 9002    |
| Light source               | LED 4000 K           | Power supply cable          | Ø 7 – 9 mm        |
| Color Rendering Index      | CRI > 70             | Protection type             | IP65              |
| Colour tolerance           | max 3 SDCM           | Protection class            | I                 |
| Lifetime ta 25° C          | L90/B10 > 50.000 h   | Impact resistance           | IK08              |
| Control gear               | 1-10V                | Windage area                | 0,047m²           |
| Input voltage AC           | 220 – 240 V          | Dimensions                  | 250 x 89 x 185 mm |
| Input voltage DC           | 195 – 250 V          | Weight                      | 2,30 kg           |
| Voltage protection         | 2 kV L/N   4 kV L/PE | Max. ambient temperature ta | 35°               |
| Luminaires per B16A / C16A | 50 / 85              |                             |                   |