
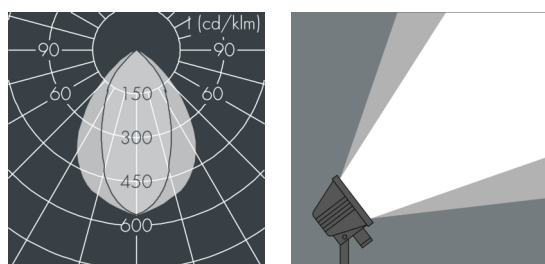


Halogen floodlight

8 536 091 009

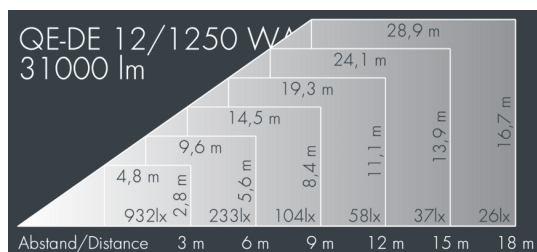

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

unpainted, Colour: unpainted, all exterior parts are stainless steel, 2 stainless steel clamps, aluminum mounting bracket: 2 holes \varnothing 9 mm, spacing 70 mm, 1 centre hole \varnothing 10.5 mm, tilt range: 110° , cable gland: PG11, connecting terminal: 3 pole, axially symmetrical aluminum reflector, 1, Beam angle (FWHM): 50° , luminous flux: 31000 lm, wattage: 1250 W, delivered lumens 25 lm/W, protection type IP55, protection class I, impact resistance IK07, dimensions (L×H×W): 375 × 160 × 240 mm, weight 3.6 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP55 IK07

Specification

| | | | |
|-----------------------|----------|--------------------|-------------------------|
| Wattage | 1250 W | Beam angle (FWHM) | 50° |
| Delivered lumens | 25 lm/W | Housing colour | unpainted |
| Color Rendering Index | 1 | Power supply cable | \varnothing 5 – 13 mm |
| Control gear | on / off | Protection type | IP55 |
| | | Protection class | I |
| | | Impact resistance | IK07 |
| | | Dimensions | 375 × 160 × 240 mm |
| | | Weight | 3,60 kg |