
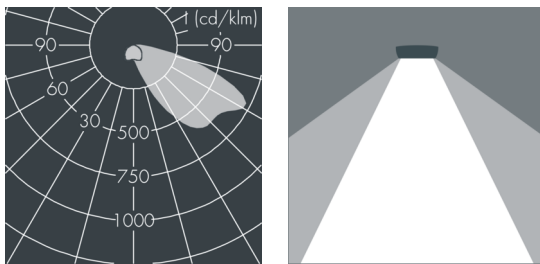


## Metaspaces

8 217 352 189

24 × max. W27 W, 2249 lm,  
2200 K – 3000 K tunable white, DALI,  
asymmetrical wide beam 64° / 133°

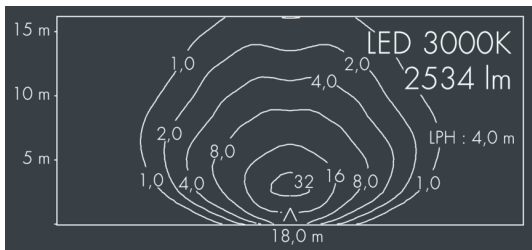

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 5 stainless steel screws, with pole top fitter for 1 luminaire for poles Ø 60/76 mm, fastening with 4 set screws M8, cable gland: M20, with 8 m cable H05RN-F3G1, connecting terminal: 3 pole, highly efficient metallized PC reflector, integral driver (DALI), CRI > 80, Beam angle (FWHM): 64° / 133°, luminous flux: 2249 lm, wattage: 27 W, delivered lumens 82 lm/W, protection type IP65, protection class II, impact resistance IK08, windage area 0,056 m<sup>2</sup>, dimensions: Ø 376 mm, width 112 mm, weight 5.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



## Specification

Wattage	27 W	Beam angle (FWHM)	64° / 133°
Delivered lumens	82 lm/W	Housing colour	silver grey
Light source	LED 2200 K – 3000 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	II
Control gear	DALI	Impact resistance	IK08
Input voltage AC	220 – 240 V	Windage area	0,056m <sup>2</sup>
Input voltage DC	176 – 280 V	Dimensions	Ø 376 mm, width 112 mm
Voltage protection	6 kV L/N   10 kV L/PE	Weight	5,10 kg
Luminaires per B16A / C16A	35 / 58	Max. ambient temperature ta	45°