



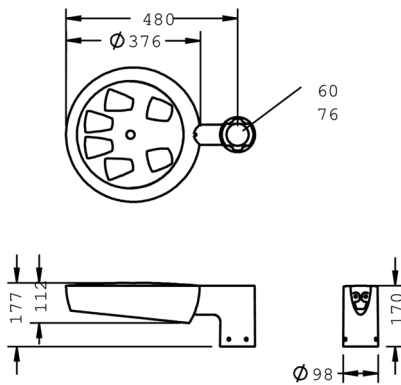

Metaspaces

8 217 362 149
4 × 11,5 W, 2169 lm,
2200 K – 3000 K tunable white, DALI,
asymmetrical beam 63°

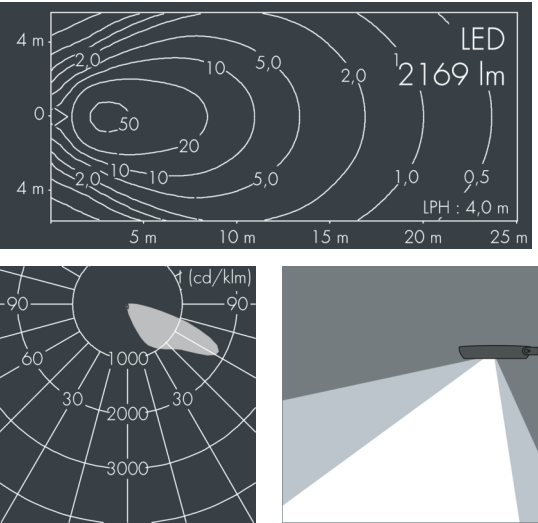

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 4 stainless steel screws, with pole top fitter for 1 luminaire for poles Ø 60/76 mm, 3 M8 grub screws, tilt range: 7°, cable gland: M20, with 8 m cable Ho5RN-F3G1, connecting terminal: 3 pole, highly efficient metallized PC reflector, integral driver (DALI), CRI > 80, luminous flux: 2169 lm, wattage: 28 W, delivered lumens 78 lm/W, protection type IP65, protection class II, impact resistance IK08, windage area 0,056 m², dimensions: Ø 376 mm, width 112 mm, weight 5,1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.

  IP65 IK08

Specification

Wattage	28 W	Housing colour	white RAL 9002
Delivered lumens	78 lm/W	Protection type	IP65
Light source	LED 2200 K – 3000 K	Protection class	II
Color Rendering Index	CRI > 80	Impact resistance	IK08
Control gear	DALI	Windage area	0,056m²
Input voltage AC	220 – 240 V	Dimensions	Ø 376 mm, width 112 mm
Input voltage DC	176 – 280 V	Weight	5,10 kg
Voltage protection	6 kV L/N 10 kV L/PE	Max. ambient temperature ta	45°
Luminaires per B16A / C16A	35 / 58		