

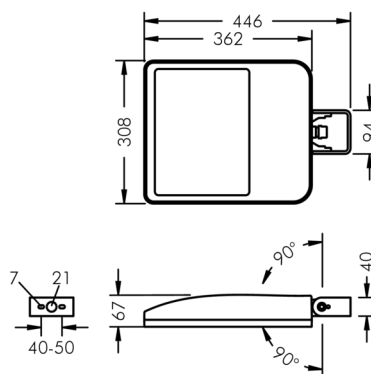






8 250 065 009

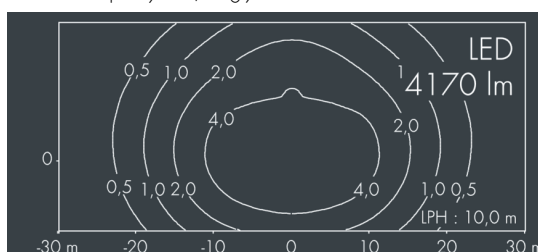

ambient temperature.

housing made of corrosion-resistant die-cast aluminum $AlSi12$, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 4 stainless steel screws, mounting bracket: 2 drilled holes $\varnothing 7$ mm, spacing 40 - 50 mm, 1 centre hole $\varnothing 21$ mm, tilt range: 180° , cable gland: M20, micro-prism optic directs light under defined angles and achieves, together with shielded LEDs, perfect glare control, integral control gear, CRI > 80 , 3 SCDM, service life $L80/B20 > 50.000$ h, Beam angle (FWHM): $71^\circ / 139^\circ$, luminous flux: 4170 lm, wattage: 55 W, delivered lumens 76 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area $0,063$ m², dimensions (L×H×W): $362 \times 67 \times 308$ mm, weight 4.6 kg

EN  IP 67 IK 08



IP 67 IK 08

Specification

Wattage	55 W	Beam angle (FWHM)	71° / 139°
Delivered lumens	76 lm/W	Housing colour	white RAL 9002
Light source	LED 4000 K	Power supply cable	Ø 5 – 14 mm
Color Rendering Index	CRI > 80	Protection type	IP67
Colour tolerance	3 SCDM	Protection class	I
Lifetime ta 25° C	L80/B20 > 50.000 h	Impact resistance	IK08
Control gear	on / off	Windage area	0,063m²
Input voltage AC	220 – 240 V	Dimensions	362 × 67 × 308 mm
Input voltage DC	220 – 240 V	Weight	4,60 kg
Voltage protection	6 kV L/N 8 kV L/PE	Max. ambient temperature ta	35°
Luminaires per B16A / C16A	10 / 16		