

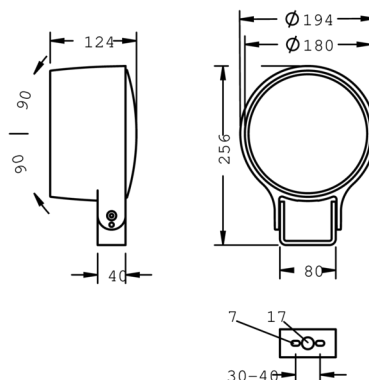





8 994 056 059

| Abstand / Distance | 3 m    | 6 m    | 9 m    | 12 m   | 15 m   |
|--------------------|--------|--------|--------|--------|--------|
| Beam Diameter (Ø)  | 5,1 m  | 10,3 m | 15,4 m | 20,6 m | 25,7 m |
| Illuminance (lx)   | 143 lx | 36 lx  | 16 lx  | 9 lx   | 6 lx   |



## Specification

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 3 stainless steel screws, mounting bracket: 2 drilled holes Ø 7 mm, spacing 30-40 mm, 1 centre hole Ø 17 mm, tilt range: 180°, cable gland: M20, connecting terminal: 3 pole, highly efficient faceted rotationally symmetrical reflector, integral driver (AC/DC), CRI > 80, luminous flux: 3770 lm, wattage: 45 W, delivered lumens 83 lm/W, protection type IP67, protection class I, impact resistance IK08, dimensions:  
Ø 194 mm, width 124 mm, weight 4 kg



IP 67 IK 08

|                       |            |                   |                        |
|-----------------------|------------|-------------------|------------------------|
| Wattage               | 45 W       | Housing colour    | silver grey            |
| Delivered lumens      | 83 lm/W    | Protection type   | IP67                   |
| Light source          | LED 3000 K | Protection class  | I                      |
| Color Rendering Index | CRI > 80   | Impact resistance | IK08                   |
| Control gear          | on / off   | Dimensions        | Ø 194 mm, width 124 mm |
|                       |            | Weight            | 4,00 kg                |