

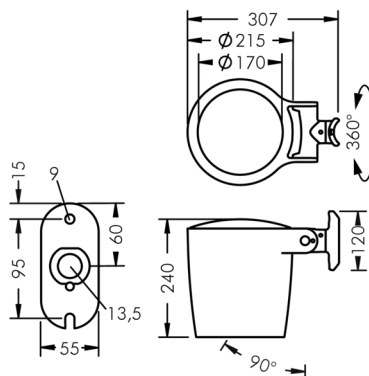




8 904 256 019

LED
5664 Im

Abstand / Distance	6 m	12 m	18 m	24 m	30 m
Beam Diameter (Ø)	0,94 m	1,89 m	2,83 m	3,78 m	4,72 m
Beam Spread (lx)	2429lx	607lx	270lx	152lx	97lx



Specification text

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



IP 67 IK 08

Specification

Wattage	70 W	Beam angle (FWHM)	9°
Delivered lumens	82 lm/W	Housing colour	silver grey
Light source	LED 3000 K	Power supply cable	Ø 6 – 13 mm
Color Rendering Index	CRI > 80	Protection type	IP67
Colour tolerance	max 2 SDCM	Protection class	I
Lifetime ta 25° C	L90/B10 > 50.000 h	Impact resistance	IK08
Control gear	on / off	Windage area	0,075m²
Input voltage AC	220 – 240 V	Dimensions	Ø 210 mm, width 210 mm
Input voltage DC	195 – 255 V	Weight	5,10 kg
Voltage protection	2 kV L/N 4 kV L/PE	Max. ambient temperature ta	35°
Luminaires per B16A / C16A	10 / 16		