

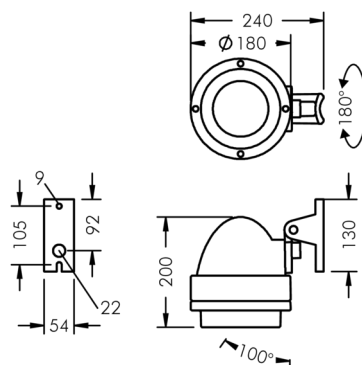




8 983 255 659

LED
2231 lm

Abstand/Distance	2 m	4 m	6 m	8 m	10 m
Beam diameter (Ø)	1,99 m	3,99 m	5,98 m	7,98 m	9,97 m
Beam spread (lx)	558lx	140lx	62lx	35lx	22lx



Specification text

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP67 IK08

Specification

Wattage	28 W	Beam angle (FWHM)	53°
Delivered lumens	81 lm/W	Housing colour	silver grey
Light source	LED 4000 K	Power supply cable	Ø 8 – 11 mm
Color Rendering Index	CRI > 80	Protection type	IP67
Colour tolerance	max 2 SDCM	Protection class	II
Lifetime ta 25° C	L90/B10 > 50.000 h	Impact resistance	IK08
Control gear	DALI	Windage area	0,035m²
		Dimensions	Ø 180 mm, width 200 mm
		Weight	2,70 kg
		Max. ambient temperature ta	35°