




## Fluxa A

8 271 061 009

for metal halide lamps (HIT-DE), , ceramic metal halide lamps (HIT-DE-CE), und high pressur sodium vapour lamps (HST-DE)

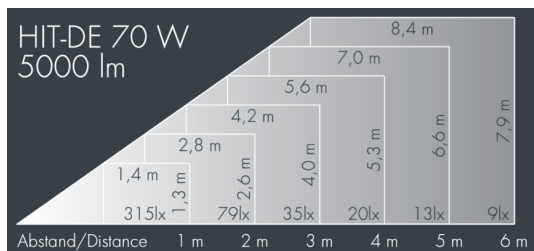

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification

Wattage	70 W	Housing colour	white RAL 9002
Delivered lumens	57 lm/W	Power supply cable	Ø 8 – 15 mm
Control gear	on / off	Protection type	IP65
		Protection class	I
		Impact resistance	IK08
		Windage area	0,11m <sup>2</sup>
		Dimensions	460 × 160 × 280 mm
		Weight	6,80 kg

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, powder coated aluminum mounting bracket with tilt scale: 4 holes Ø 8.5 mm, spacing 70 mm (120 mm), 2 drilled holes Ø 10 mm, spacing 200 mm, 1 centre hole Ø 22 mm, tilt range: 210°, cable gland: M20, connecting terminal: 3 pole, high gloss asymmetrical aluminum reflector, integral ballast and ignitor, LPF, HPF available on request, luminous flux: 5000 lm, wattage: 70 W, delivered lumens 57 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,11 m<sup>2</sup>, dimensions (L×H×W): 460 × 160 × 280 mm, weight 6.8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08