
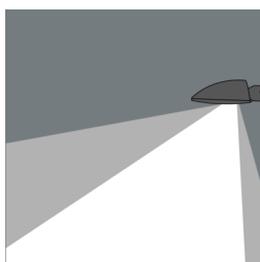
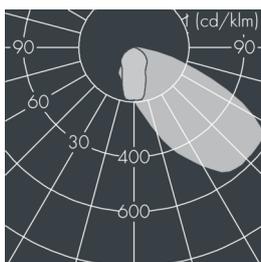


Fluxa B

8 276 145 009

for high pressure sodium vapour lamps (HST-DE)

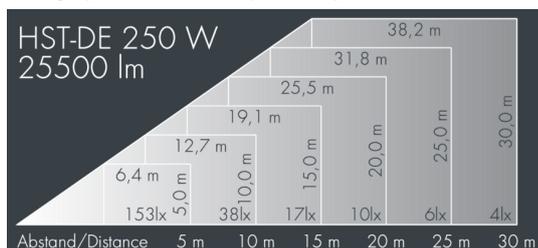

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 2 stainless steel screws, 230 mm arm, 2 drilled holes \varnothing 10.5 mm, spacing 58 mm, cable gland: M20, connecting terminal: 3 pole, high gloss asymmetrical aluminum reflector, integral ballast and ignitor, LPF, HPF available on request, luminous flux: 25500 lm, wattage: 250 W, delivered lumens 94 lm/W, protection type IP54, protection class I, impact resistance IK09, windage area 0,19 m², dimensions (L×H×W): 730 × 185 × 335 mm, weight 14.7 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP 54 IK09

Specification

| | | | |
|------------------|----------|--------------------|-------------------------|
| Wattage | 250 W | Housing colour | black RAL 7021 |
| Delivered lumens | 94 lm/W | Power supply cable | \varnothing 8 – 15 mm |
| Control gear | on / off | Protection type | IP54 |
| | | Protection class | I |
| | | Impact resistance | IK09 |
| | | Windage area | 0,19m ² |
| | | Dimensions | 730 × 185 × 335 mm |
| | | Weight | 14,70 kg |