



Metaspace

8 215 342 149

4 × 11,5 W, 2169 lm,

2200 K – 3000 K tunable white, DALI,

asymmetrical beam 63°

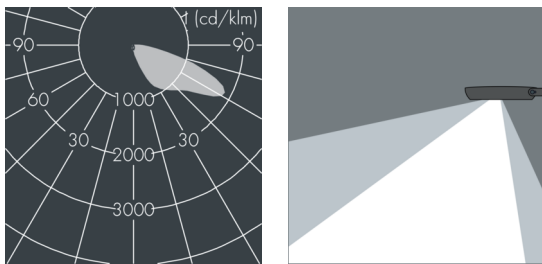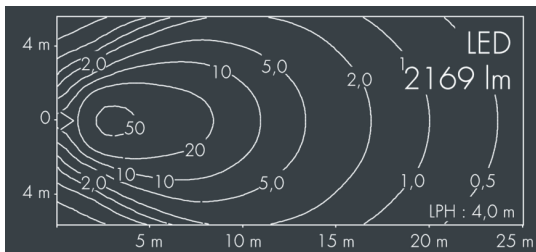

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 5 stainless steel screws, with pole top fitter for 1 luminaire for poles \varnothing 60/76 mm, fastening with 4 set screws M8, tilt range: 7°, cable gland: M20, with 8 m cable Ho5RN-F3G1, connecting terminal: 3 pole, highly efficient metallized PC reflector, integral driver (DALI), CRI > 80, luminous flux: 2169 lm, wattage: 28 W, delivered lumens 78 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,056 m², dimensions: \varnothing 376 mm, width 112 mm, weight 5.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



Specification

Wattage	28 W	Housing colour	black RAL 7021
Delivered lumens	78 lm/W	Protection type	IP65
Light source	LED 2200 K – 3000 K	Protection class	I
Color Rendering Index	CRI > 80	Impact resistance	IK08
Control gear	DALI	Windage area	0,056m ²
Input voltage AC	220 – 240 V	Dimensions	\varnothing 376 mm, width 112 mm
Input voltage DC	176 – 280 V	Weight	5,10 kg
Voltage protection	6 kV L/N 10 kV L/PE	Max. ambient temperature ta	45°
Luminaires per B16A / C16A	35 / 58		