
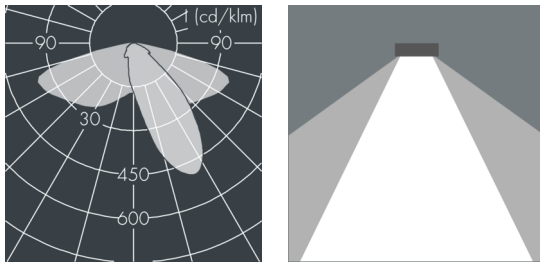


Metaspaces

8 217 346 399

6 × 8,6 W, 7204 lm, 3000 K warm white, Zhaga 18 - up,

Street Optic 36° / 155°

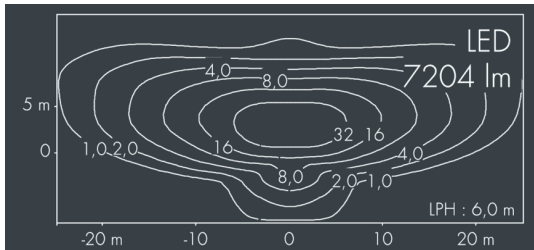

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 5 stainless steel screws, with pole top fitter for 1 luminaire for poles \varnothing 60/76 mm, fastening with 4 set screws M8, cable gland: M20, PMMA linsen, integral driver (AC/DC), CRI > 80, Beam angle (FWHM): 36° / 155°, luminous flux: 7204 lm, wattage: 53 W, delivered lumens 137 lm/W, protection type IP65, protection class II, impact resistance IK08, windage area 0,056 m², dimensions: \varnothing 376 mm, width 112 mm, weight 5 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.

  IP65 IK08

Specification

Wattage	53 W	Beam angle (FWHM)	36° / 155°
Delivered lumens	137 lm/W	Housing colour	black RAL 7021
Light source	LED 3000 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	II
Control gear	Zhaga 18 - oben	Impact resistance	IK08
Input voltage AC	220 – 240 V	Windage area	0,056m ²
Input voltage DC	220 – 240 V	Dimensions	\varnothing 376 mm, width 112 mm
Voltage protection	6 kV L/N 8 kV L/PE	Weight	5,00 kg
Luminaires per B16A / C16A	10 / 16	Max. ambient temperature ta	45°