




Metaspot 2

8 242 066 039

35 W, 3032 lm, 3000 K warm white,
linear, horizontal 9° / 36°

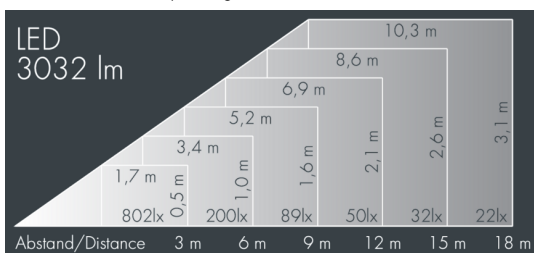

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification

Wattage	35 W
Delivered lumens	87 lm/W
Light source	LED 3000 K
Color Rendering Index	CRI > 80
Colour tolerance	3
Lifetime ta 25° C	L90/B10 > 50.000 h
Control gear	on / off
Input voltage AC	220 – 240 V
Input voltage DC	220 – 240 V
Voltage protection	6 kV L/N 10 kV L/PE
Luminaires per B16A / C16A	20 / 33

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, tool-free twist closure, mounting bracket: 2 drilled holes Ø 9 mm, spacing 40 mm, 1 centre hole Ø 14 mm, tilt range: 180°, cable gland: M20, connecting terminal: 3 pole, light source completely shielded, high gloss aluminium reflector, integral driver (AC/DC), CRI > 80, 3, service life L90/B10 > 50.000 h, Beam angle (FWHM): 9° / 36°, luminous flux: 3032 lm, wattage: 35 W, delivered lumens 87 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,045 m², dimensions: Ø 176 mm, width 245 mm, weight 3,6 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08