




## Monospot 2

8 902 245 189

14 W, 810 lm, 4000 K neutral white, DALI,  
Street Optic  $41^\circ / 137^\circ$

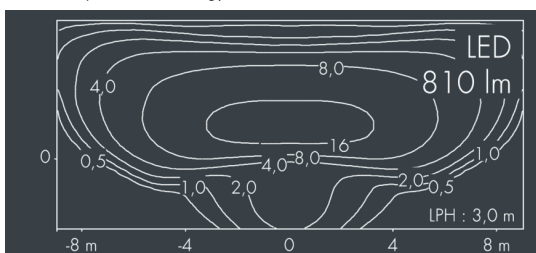

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 3 stainless steel screws, for installation on poles  $\varnothing 60 - 100$  mm, tiltable base made of powder coated aluminum, 2 drilled holes  $\varnothing 9$  mm, spacing 95 mm, 1 centre hole  $\varnothing 13.5$  mm, tilt range:  $90^\circ$ ,  $360^\circ$  adjustable, cable gland: M20, connecting terminal: 5 pole, lens for batwing light distribution made of highly efficient optical silicon, integral, dimmable driver (DALI), CRI > 70, max 3 SDCM, service life  $L_{90}/B_{10} > 50.000$  h, Beam angle (FWHM):  $41^\circ / 137^\circ$ , luminous flux: 810 lm, wattage: 14 W, delivered lumens 59 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,021 m<sup>2</sup>, dimensions:  $\varnothing 133$  mm, width 153 mm, weight 1.9 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP67 IK08

## Specification

Wattage	14 W	Beam angle (FWHM)	$41^\circ / 137^\circ$
Delivered lumens	59 lm/W	Housing colour	black RAL 7021
Light source	LED 4000 K	Power supply cable	$\varnothing 5 - 9$ mm
Color Rendering Index	CRI > 70	Protection type	IP67
Colour tolerance	max 3 SDCM	Protection class	I
Lifetime ta 25° C	$L_{90}/B_{10} > 50.000$ h	Impact resistance	IK08
Control gear	DALI	Windage area	0,021 m <sup>2</sup>
Input voltage AC	220 – 240 V	Dimensions	$\varnothing 133$ mm, width 153 mm
Input voltage DC	220 – 240 V	Weight	1,90 kg
Voltage protection	2 kV L/N   4 kV L/PE	Max. ambient temperature ta	40°
Luminaires per B16A / C16A	50 / 85		