



## Nanodot

8 400 017 089

1.5 W, 144 lm, 2700 K warm white,  
lateral wide beam 30° / 105° ,

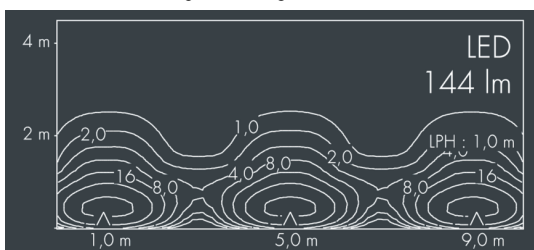

## Specification text

luminaire made of corrosion-resistant stainless steel (V4A), Colour: stainless steel (V4A) , all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, installation housing made of fibreglass reinforced plastic, cable gland:

2 x 130 mm FEP single wires and 2 x IP67 silicone-potted pressure clamp connectors, for flush mounting into round handrails, suitable for outer diameter 38 - 45 mm, precise light control with miniature polycarbonate optic, CRI > 80, max 2 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 30° / 105°, luminous flux: 144 lm, wattage: 1.5 W, delivered lumens 101 lm/W, protection type IP67, protection class III, impact resistance IK10, dimensions: Ø 20 mm, width 17 mm, weight 0.06 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



IP 67 IK 10

## Specification

Wattage	1.5 W	Beam angle (FWHM)	30° / 105°
Delivered lumens	101 lm/W	Housing colour	stainless steel (V4A)
Light source	LED 2700 K	Protection type	IP67
Color Rendering Index	CRI > 80	Protection class	III
Colour tolerance	max 2 SDCM	Impact resistance	IK10
Lifetime ta 25° C	L90/B10 > 50.000 h	Dimensions	Ø 20 mm, width 17 mm
Control gear	on / off / DALI	Weight	0,06 kg
Input voltage DC	2,8 V	Max. ambient temperature ta	40°